

HyperSync[®] Results Canon 5D Mark II + Einstein E640 Highest Energy

IMAGES BEGIN ON THE NEXT PAGE!

On the following pages you will find images generated using <u>HyperSync[®]</u> with the <u>Canon 5D Mark II</u> and the Einstein E640. To achieve similar results, use the settings detailed below.

Test Conditions: These images were captured indoors, with the camera and flash positioned 6 ft (2 m) from a white wall. A standard reflector was used, but the light was otherwise unmodified. Your results may differ depending upon the position of your lights and ambient conditions.

Transmitter Settings: These images were generated using FlexTT5 Version 6.400 – results may change with future firmware releases.

- 1. Use a <u>Canon MiniTT1 or FlexTT5</u> updated to the latest firmware.
- 2. Manually select your camera model under the "Misc" tab.
- 3. All other transmitter settings may be left at their defaults.

Receiver Settings: These images were generated using PowerMC2 Version 2.400 – results may change with future firmware releases.

- 1. Use a <u>PowerMC2</u> receiver updated to the latest firmware.
- 2. Set the "Optimize HyperSync Automation For:" control to "Highest Energy" under the "HyperSync" tab.
- 3. All other receiver settings may be left at their defaults.


Camera Settings: The images in this document were captured using ISO 200 and f/11, at all camera shutter speeds. All other camera settings were factory defaults. Your results may differ depending on your camera settings and exposure.


Flash Settings: The Einstein E640 is an IGBT-controlled flash. Use the Einstein at full power for best results. These images were gathered at full power (+3 on the <u>AC3 ZoneController</u>) and half power (+2) to illustrate this flash behavior.

Visit the <u>HyperSync page</u> on the <u>PocketWizard Wiki</u> for more information!

© 2013 LPA Design, Inc. All rights reserved. Product features and specifications are subject to change without notice. PocketWizard, ControlTL, MiniTT1, FlexTT5, HyperSync, Plus II, Plus III, Plus X and MultiMAX are either trademarks or registered trademarks of LPA Design, Inc. All other trademarks contained herein are the property of their respective owners.

HyperSync® Results, Cover Page Revision 1.1

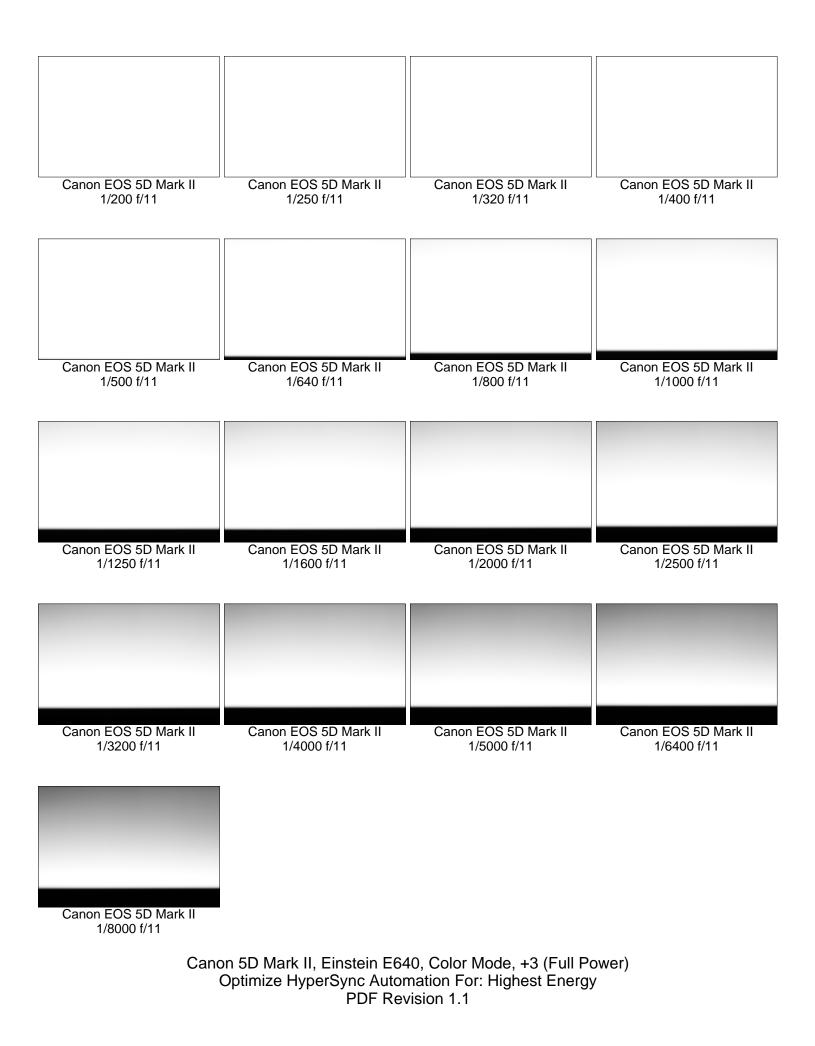

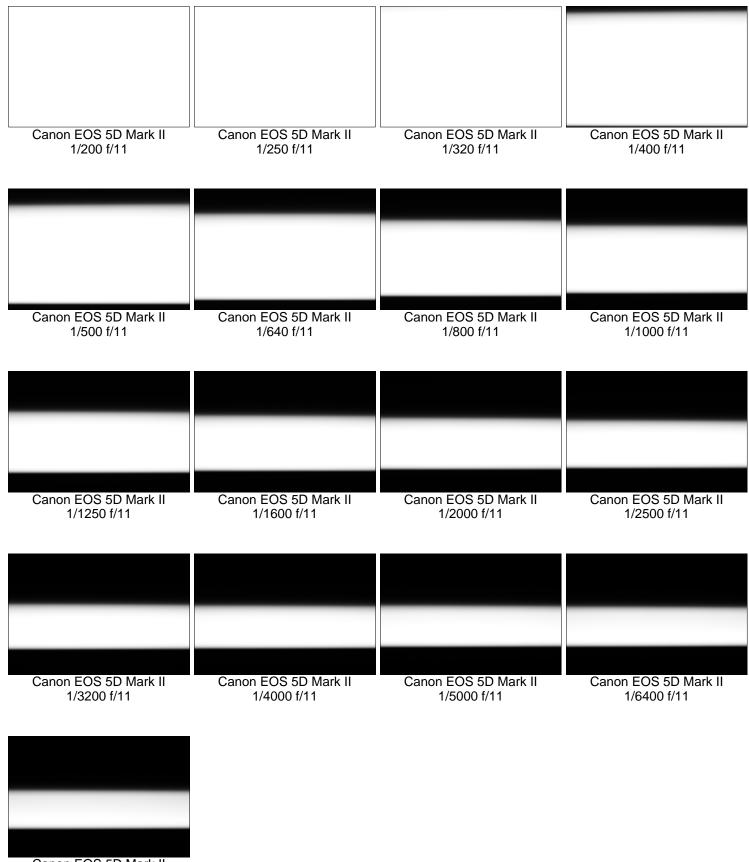

Canon EOS 5D Mark II 1/8000 f/11

> Canon 5D Mark II, Einstein E640, Color Mode, +2 (1/2 Power) Optimize HyperSync Automation For: Highest Energy PDF Revision 1.1